2 0 1 7 - 1 8

W H I T M O R E

C O R P O R A T E

B R A N D A R D S











REGISTERED TRADEMARKS

AccuTrack [®]	GearMate [®]	Numatrix [®]	SurTac [®]
Air Sentry®	Gorilla Grease®	OilSafe [®]	SwitchArmor®
Armor/Plate®	Grease Safe ®	Omnitask [®]	TOR Armor®
BioRail [®]	Guardian ®	OmniTemp [®]	TrackMate™
Citrus Select®	Handi-Lube®	RailArmor [®]	Whitcam [®]
ColorGuard®	Label Pocket®	RailGuard®	WhitLuber®
EarthKeeper ®	Label Safe®	RailMaster [®]	Whitmore [®]
Enviro Gard®	Matrix [®]	RailMax [®]	Whitmore's®
EnviroLube ®	MultiPlus [®]	SteelMaster®	WhitSlide®
EZ Switch®	Novagard®	SurStik [®]	WhitZorb®

Why brand matters

Our success depends on our ability to build good relationships with our partners, clients and employees. By building trust and rapport, brands both begin and continually reinforce these relationships. A brand is a promise to deliver on what an organization claims, and broken promises risk the brand losing loyalty.

Applying the brand

Please be sure to keep the integrity of the design schemes. Significant investment has been made in this program and artwork, and payoff is only realized when we all use the brand in a consistent and professional manner. Templates are not to be altered without consent.

Who to contact regarding branding

To view and download mentioned logos, visit our online branding page, whitmores.com/branding. If you have any questions related to our branding, contact our Marketing Department at marketing@whitmores.com.

Logo placement

The Whitmore logo must be clearly placed on all of our marketing communications materials and marketing tools, as well as on documents created for our various stakeholders.

Logo orientation

The ideal placement for the Whitmore logo is centered. If this is not possible, the next best location is flush left. Since the complete mark is weighted to the left, the logo looks odd when forced to the right side of the page. Please ensure that the minimum whitespace requirement (as stated below) is respected and that the integrity of the logo—including its proportions, colors and placement—is not changed.

Whitespace

To ensure good presentation of our logo, it is necessary to use a minimal amount of whitespace around the logo. The minimum requirement of whitespace around the logo is the width of the letter "E" in "WHITMORE." This will ensure that no graphic interferes with our branding.



Small spaces

When using the Whitmore logo in places where space is limited, a stacked version may be used to maintain the proper presence for the brand. Note that the horizontal version of the logo is the primary Whitmore logo and should be used whenever possible.

If the horizontal Whitmore logo must be reduced to a size of less than one inch, then the ® should be removed.



Whenever possible the Whitmore logo should be printed using "Whitmore Red" and Black. In the case of four color process, the designated screen mix for "Whitmore Red" is C 0, M 95, Y 100, K 0.





2 spot color

In the case of spot color printing, use PMS 485C for printing "Whitmore Red." The PMS color breakdown is R 238, G 49, B 36.





1 color

The Whitmore logo can be printed in "Whitmore Red" or Black as shown below.







Reversed out of a dark background

Anytime the logo is reversed out of a dark background the logo should appear as a single color. Use either white or "Whitmore Red" when printing solid color or four color process.



The official Whitmore color swatches are shown below. Note that the print colors are Pantone colors. These are standard colors enabling print shops to reproduce exactly the desired color. Only use Pantone colors when printing through a professional print shop. The RGB colors are for web use. These colors should be used as our official colors online and on documents that will be viewed on screen.

PRINT COLORS





WEB COLORS





Large banner with logo

12' x 3'



Small banner with logo



Whenever possible the Whitmore Rail logo should be printed using "Whitmore Rail Blue" and Black. In the case of four color process, the designated screen mix for "Whitmore Rail Blue" is C 90, M 57, Y 0, K 0.





2 spot colors

In the case of spot color use PMS 485C. The PMS color breakdown is R 2, G 108, B 182.





1 color

The Whitmore Rail logo can be printed in "Whitmore Rail Blue" or Black as shown below.










Reversed out of a dark background


Anytime the logo is reversed out of a dark background the logo should appear as a single color. Use either white or "Whitmore Rail Blue" when printing solid color or four color process.



The official Whitmore Rail color swatches are shown below. Note that the print colors are Pantone colors. These are standard colors enabling print shops to reproduce exactly the desired color. Only use Pantone colors when printing through a professional print shop. The RGB colors are for web use. These colors should be used as our official colors online and on documents that will be viewed on screen.

PRINT COLORS





WEB COLORS





Large banner with logo

12' x 3'



Small banner with logo



In the case of four color process, the designated screen mix for the OilSafe logo is C 0, M 94, Y 100, K 0 (Red); C 94, M 0, Y 0, K 100 (Green); C 100, M 46, Y 0, K 0 (Blue); C 0, M 24, Y 94, K 0 (Yellow) and Black. Please note that the white drop in the logo has a gradient.



5 color

In the case of spot color use PMS 1795C (Red), PMS 355C (Green), PMS 2935C (Blue), PMS 123C (Yellow) and Black.



1 color

The OilSafe logo can be printed in Black as shown below.




Reversed out of a dark background

Anytime the logo is reversed out of a dark background the logo should appear as a single White color.



The official OilSafe color swatches are shown below. Note that the print colors are Pantone colors. These are standard colors enabling print shops to reproduce exactly the desired color. Only use Pantone colors when printing through a professional print shop. The RGB colors are for web use. These colors should be used as our official colors online and on documents that will be viewed on screen.

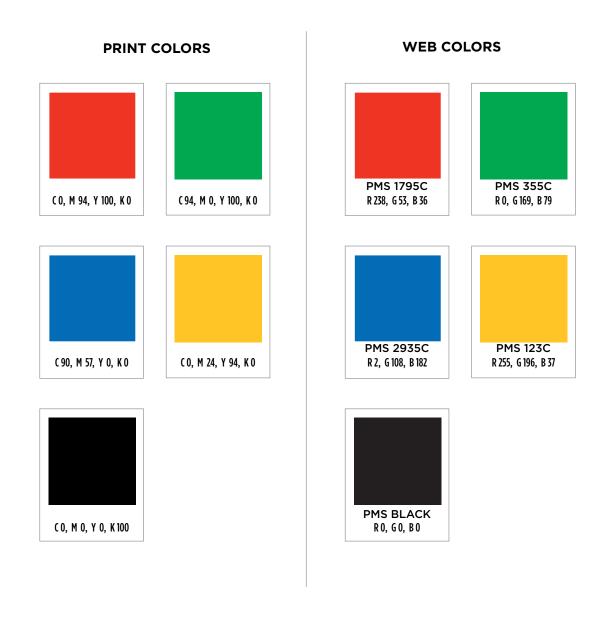

Large banner with logo

10' x 3'



Small banner with logo



In the case of four color process, the designated screen mix for "Air Sentry Yellow" is C O, M 38, Y 100, K O (Yellow) or Black.



1 spot color

In the case of spot color use PMS 130C. The PMS color breakdown is R 247, G 168, B 0.



1 color

The Air Sentry logo can be printed in Black as shown below.




Reversed out of a dark background


Anytime the logo is reversed out of a dark background the logo can appear in "Air Sentry Yellow" or white.




The official Air Sentry color swatches are shown below. Note that the print colors are Pantone colors. These are standard colors enabling print shops to reproduce exactly the desired color. Only use Pantone colors when printing through a professional print shop. The RGB colors are for web use. These colors should be used as our official colors online and on documents that will be viewed on screen.


PRINT COLORS





WEB COLORS





Large banner with logo

10' x 3'



Small banner with logo









These logos are not to be used



Do not swap or change logo colors



Do not change logo fonts



Do not swap or change logo colors



Do not stretch or compress the logo

A note on font usage

To ensure consistency and reinforce our identity, the following fonts should be used whenever possible. Note that our fonts were chosen for their legibility as well as their overall look.

Gotham Fonts

Gotham Light Performance Under Pressure

Gotham Light Italic Performance Under Pressure

Gotham Light Condensed Performance Under Pressure

Gotham Book Performance Under Pressure

Gotham Book Italic Performance Under Pressure

Gotham Book Condensed Performance Under Pressure

Gotham Medium Performance Under Pressure

Gotham Medium Italic Performance Under Pressure

Gotham Medium Condensed Performance Under Pressure

Gotham Bold Performance Under Pressure

Gotham Bold Italic Performance Under Pressure

Gotham Bold Condensed Performance Under Pressure

Gotham Black Performance Under Pressure

Gotham Black Italic **Performance Under Pressure**

When Gotham fonts are not available

If designated fonts above are unavailable, the following fonts should be used.

Futura Fonts

Futura Book Performance Under Pressure

Futura Book Italic Performance Under Pressure

Futura Book Condensed Performance Under Pressure

Futura Bold Performance Under Pressure

Futura Bold Oblique Performance Under Pressure

Whitmore® and its product lines, Whitmore Rail,® OilSafe® and Air Sentry® have logos available on the branding website at whitmores.com/branding. Whitmore does not allow non-approved removal of our brands and private labeling of our products. If private labeling is desired, contact your local Sales Representative or sales@whitmores.com for more information.

Products sold in the United States

For products sold in the United States, we will provide the standard U.S.A. SDS document and packages will have labels with the appropriate GHS information.

Products sold outside the United States

If your local market has different SDS and GHS requirements, Whitmore will provide a local language SDS with the required health and safety language and pictograms for the country. Contact regulatory@whitmores.com to request the document(s).

Editable pdf files for Whitmore branded labels are available for other countries. Contact kendra.campbell@whitmores.com to request these labels and guidelines.

Distributors are responsible for sending customers the translated SDS and re-labeling packages with local language GHS information for sale in their market.



WHITMORE/DISTRIBUTOR AGREEMENT

IN WITNESS WHEREOF, this WHITMORE CORPORATE BRAND STANDARDS was read, agreed upon under the hands of their duly authorized officers and made effective as of the date first written	
Distributor Employee Name	Date
Distributor Employee Title	
Whitmore Employee Name	Date
Whitmore Employee Title	